



EnergyCell RE Top Terminal Battery

VRLA Battery for Renewable Energy Storage

- Designed for Renewable Energy Applications
- Robust Lead-Alloy Plates for Extended Cycle Life
- Computer Generated Grid Design Optimized for High Power Density
- Low-Calcium Grid Alloy for Reduced Gas Emissions and Ease of Recycling
- Frame-Arresting, One-Way Pressure-Relief Vent for Safety and Long Life
- UL-Recognized Component




The EnergyCell RE Top Terminal valve regulated lead acid battery is designed for high power density and renewable energy cycling applications. Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom of electrolyte maintenance. The EnergyCell RE also features low profile terminals with threaded copper alloy inserts providing increased safety and reduced maintenance.

EnergyCell RE Top Terminal Battery Specifications

	EnergyCell 34RE	EnergyCell 52RE	EnergyCell 78RE	EnergyCell 95RE	EnergyCell 106RE
Cells Per Unit	6	6	6	6	6
Voltage Per Unit	12.84 VDC	12.84 VDC	12.84 VDC	12.84 VDC	12.84 VDC
Electrolyte	Absorbed H ₂ SO ₄ , SG=1.300				
Operating Temperature Range (with temperature compensation)	Discharge: -40 to 71°C (-40 to 160°F) Charge: -23 to 60°C (-10 to 140°F)				
Normal Operating Temp Range	20 to 27°C (68 to 80°F)				
Recommended Maximum Charging Current Limit Per String	C/5 Amps @ 20hr rate				
Float Charging Voltage	13.5 to 13.8 VDC / unit average at 25°C (77°F)				
Equalization and Cycle Service Charging Limits	14.4 to 14.8 VDC / unit average at 25°C (77°F)				
Self Discharge	Battery can be stored up to 6 months at 25°C (77°F) before a freshening charge is required. Batteries stored at temperatures greater than 25°C (77°F) will require recharge sooner than batteries stored at lower temperatures.				
Terminal	Copper alloy insert terminal to accept 10"-32 UNC bolt		Copper alloy insert terminal to accept ¼"-20 UNC bolt		
Terminal Hardware Initial Torque	30 in-lbs (3.4 Nm)		110 in-lbs (12.4 Nm)		
Weight	27 lbs (12 kg)	40 lbs (18 kg)	54 lbs (25 kg)	64 lbs (30 kg)	69 lbs (31 kg)
Dimensions (H x D x W)	6.80 x 7.76 x 5.19" (172.7x197.1x131.9cm)	8.07 x 9 x 5.48" (205.1x228.6x139.2cm)	8.01 x 10.76 x 6.83" (203.5x273.2x173.4cm)	8.06 x 12.51 x 6.83" (204.8x317.8x173.4cm)	8.52 x 13.42 x 6.80" (216.4x340.9x172.7cm)

12 Volts - Ampere Hour Capacity to 1.75 Volts Per Cell at 77°F (25°C)

Discharge in Hours	1	2	3	4	5	6	7	8	10	12	20	24	72	100
EnergyCell 34RE	19.7	23.6	26.1	28	29	29.6	30.1	30.4	31.1	31.7	33	33.1	33.8	34
EnergyCell 52RE	29.6	35.1	38.9	41.4	43.3	44.6	45.4	46	47.2	48	50	50.4	51.8	52
EnergyCell 78RE	43.5	53.2	58.5	62	64.5	66.6	68.6	69.6	71	72	75	75.6	77.6	78
EnergyCell 95RE	47	58	66	70.8	74	76.2	78	79.2	81.7	83.6	88	88.8	93	95
EnergyCell 106RE	49.2	61.5	70	76	80.6	84	86.8	89	92	94.2	100	101	104	106

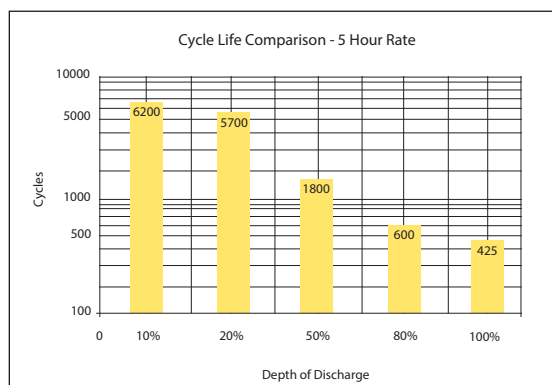

Recicla tu
acumulador usado

Mty (81) 1968-5071 Todo el País 01 800 110 110 1
ventascorporativas@batterymart.com.mx

batterymart.com.mx
 /batterymartmx